




## Ventilatori

- PLAŠT I OBRITNO KOLO VENTILATORA IZRADJENI OD MATERIJALA OTPORNIH NA AGRESIVNE GASOVE I AEROSOLI
- STRUJANJE GASOVA VAN MOTORA VENTILATORA
- KAPACITETI VENTILATORA OD 500<sup>3</sup>/h DO 1800<sup>3</sup>/h
- OPCIONO – AUTOMATSKA REGULACIJA ODSISAVANJA

DIGESTORI- PREMA POLOŽAJU OTVORA PREDNJEG ZAKLONA

LABORATORIJSKI PROSTOR- PREMA POTREBI ZA NADOKNADOM VAZDUHA

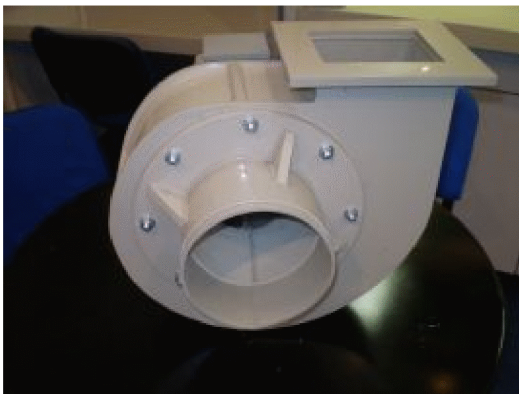

Orijentacione vrednosti za eshauaciju digestora

Hauba sa konstantnim protokom

TIP DIGESTORA	DIMENZIJE	OPTIMALNE VREDNOSTI		MINIMALNE VREDNOSTI		DIMENZIJA PRIKLJUČKA
		m <sup>3</sup> /h	Pa	m <sup>3</sup> -h	Pa	
	mm.					mm.
DS-ON	1240/800/2500	520	50	420	30	160
DS-ON	1540/800/2500	630	70	500	45	160



DS-ON	2000/800/2500	800	90	620	60	200
DS-PN	1240/800/2500	570	55	460	35	180
DS-PN	1540/800/2500	700	75	560	50	180
DS-PN	2000/800/2500	900	100	720	70	250
LN	1240/800/1570	480	50	420	30	160

#### Hauba sa dodatnim vazduhom

TIP DIGESTORA	DIMENZIJE	OPTIMALNE VREDNOSTI		MINIMALNE VREDNOSTI		DIMENZIJA PRIKLJUČKA
		m3/h	Pa	m3-h	Pa	
	mm.					mm.
DS-ON	1240/800/2500	360	50	290	30	160/140
DS-ON	1540/800/2500	440	70	350	45	160/160
DS-ON	2000/800/2500	560	90	430	60	200/180
DS-PN	1240/800/2500	390	55	320	35	180/160
DS-PN	1540/800/2500	500	75	390	50	180/180
DS-PN	2000/800/2500	630	100	500	70	250/200
LN	1240/800/1570	330	50	300	30	160/140